




SOLAR, OPTICAL AND COLOUR FASTNESS PROPERTIES

SHADING CO-EFFICIENT

The solar heat gain with the blind at the window divided by the solar heat gain with no blind at the window. The lower the shading co-efficient, therefore, the higher the efficiency of the fabric. The test results in the table below have been achieved using a single 6mm glass glazing system.

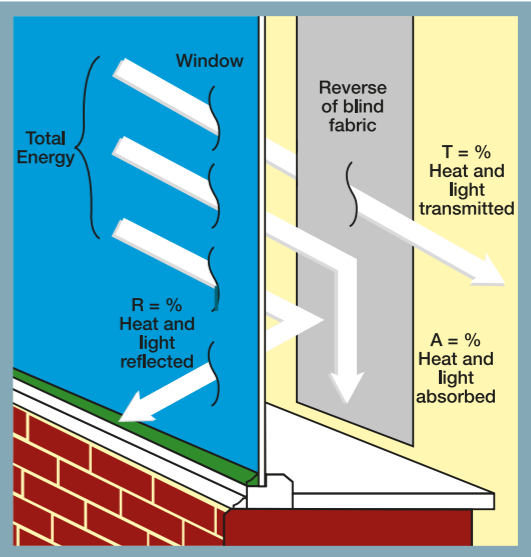

OBSCURA | SOLAR, OPTICAL PERFORMANCE CHART

COLOUR RANGE	OPTICAL & SOLAR TRANS %	SOLAR REFLECTION %	HEAT & LIGHT ABSORPTION %	SUN BLOCK %	ULTRAVIOLET PROTECTION %
BLACK WHITE	0	73	27	100	100
BOTTLE GREEN	0	8	92	100	100
BURGUNDY	0	17	83	100	100
NAVY	0	9	91	100	100
BLACK	0	5	95	100	100
IRON	0	29	71	100	100
SEA BLUE	0	64	36	100	100
GREY	0	49	51	100	100
MINT GREEN	0	66	34	100	100
PINK	0	66	34	100	100
WHITE	0	73	27	100	100
MAGNOLIA	0	65	35	100	100
BEIGE	0	65	35	100	100

Obscura

Performance Fabrics for Roller & Vertical Blinds

ARCHITECTS SPECIFIERS CONTRACTORS

CJ/SfB 1976 reference by SfB Agency		
(767)	X	



FIRE PROTECTION

Obscura meets FR standard BS 5867 Part 2 Type B. Further information is available on request.



North West, West Midlands & Wales
 Pentel Contracts Limited • Dyer Street, off Ordsall Lane
 Salford • Manchester • M5 4TH
 t • 0161 872 7642 f • 0161 872 7636
 e • info@pentel-contracts.com www.pentel-contracts.com



Rest of UK
 Dearnleys Limited • 120-128 Wrenthorpe Road
 Wrenthorpe • Wakefield • W. Yorkshire WF2 0JN
 t • 01924 371 791 f • 01924 386 001
 e • info@dearnleys.com www.dearnleys.com



Black White




Bottle Green



Burgundy



Navy



Black



Iron



Sea Blue



Grey



Mint Green



Pink



White



Magnolia



Beige

Obscura

Performance Fabrics for Roller & Vertical Blinds

COLOUR RANGE	13
LOUVRE WIDTHS	127mm (5") / 89mm (3.5")
ROLLER WIDTH	1830mm (72") / 2500mm (98.4") / 3000mm (118.1")
FABRIC COMPOSITION	4 ply; 75% PVC, 25% Fibreglass
FABRIC WEIGHTS	407g/m ² - 12oz/syd
FLAMMABILITY STANDARDS	Conforms to BS5867, Part2: Type B2008 IMO 2010 FTP Code
COLOUR FASTNESS	Tested in accordance with BS EN ISO 105-B01: 1999
SHADING	Blackout. Suitable for computer environments
CLEANING	Wipe clean.
MOISTURE RESISTANCE	Suitable for moist conditions
ANTI BACTERIAL	Incorporates Biosafe [®] Formula
AVAILABILITY	Ex-stock
FABRIC SAMPLES	Available on request

AT A GLANCE



roller blind



vertical blind



flame retardant



black out



suitable for moist environments



wipe clean



Colours reproduced here may vary from the actual colours due to the limitations of the printing process. Great care has been taken to ensure that the fabric swatches and the information supplied are correct, however specifiers and customers are advised to check the suitability of materials before use.

LARGER SAMPLES ARE AVAILABLE ON REQUEST.